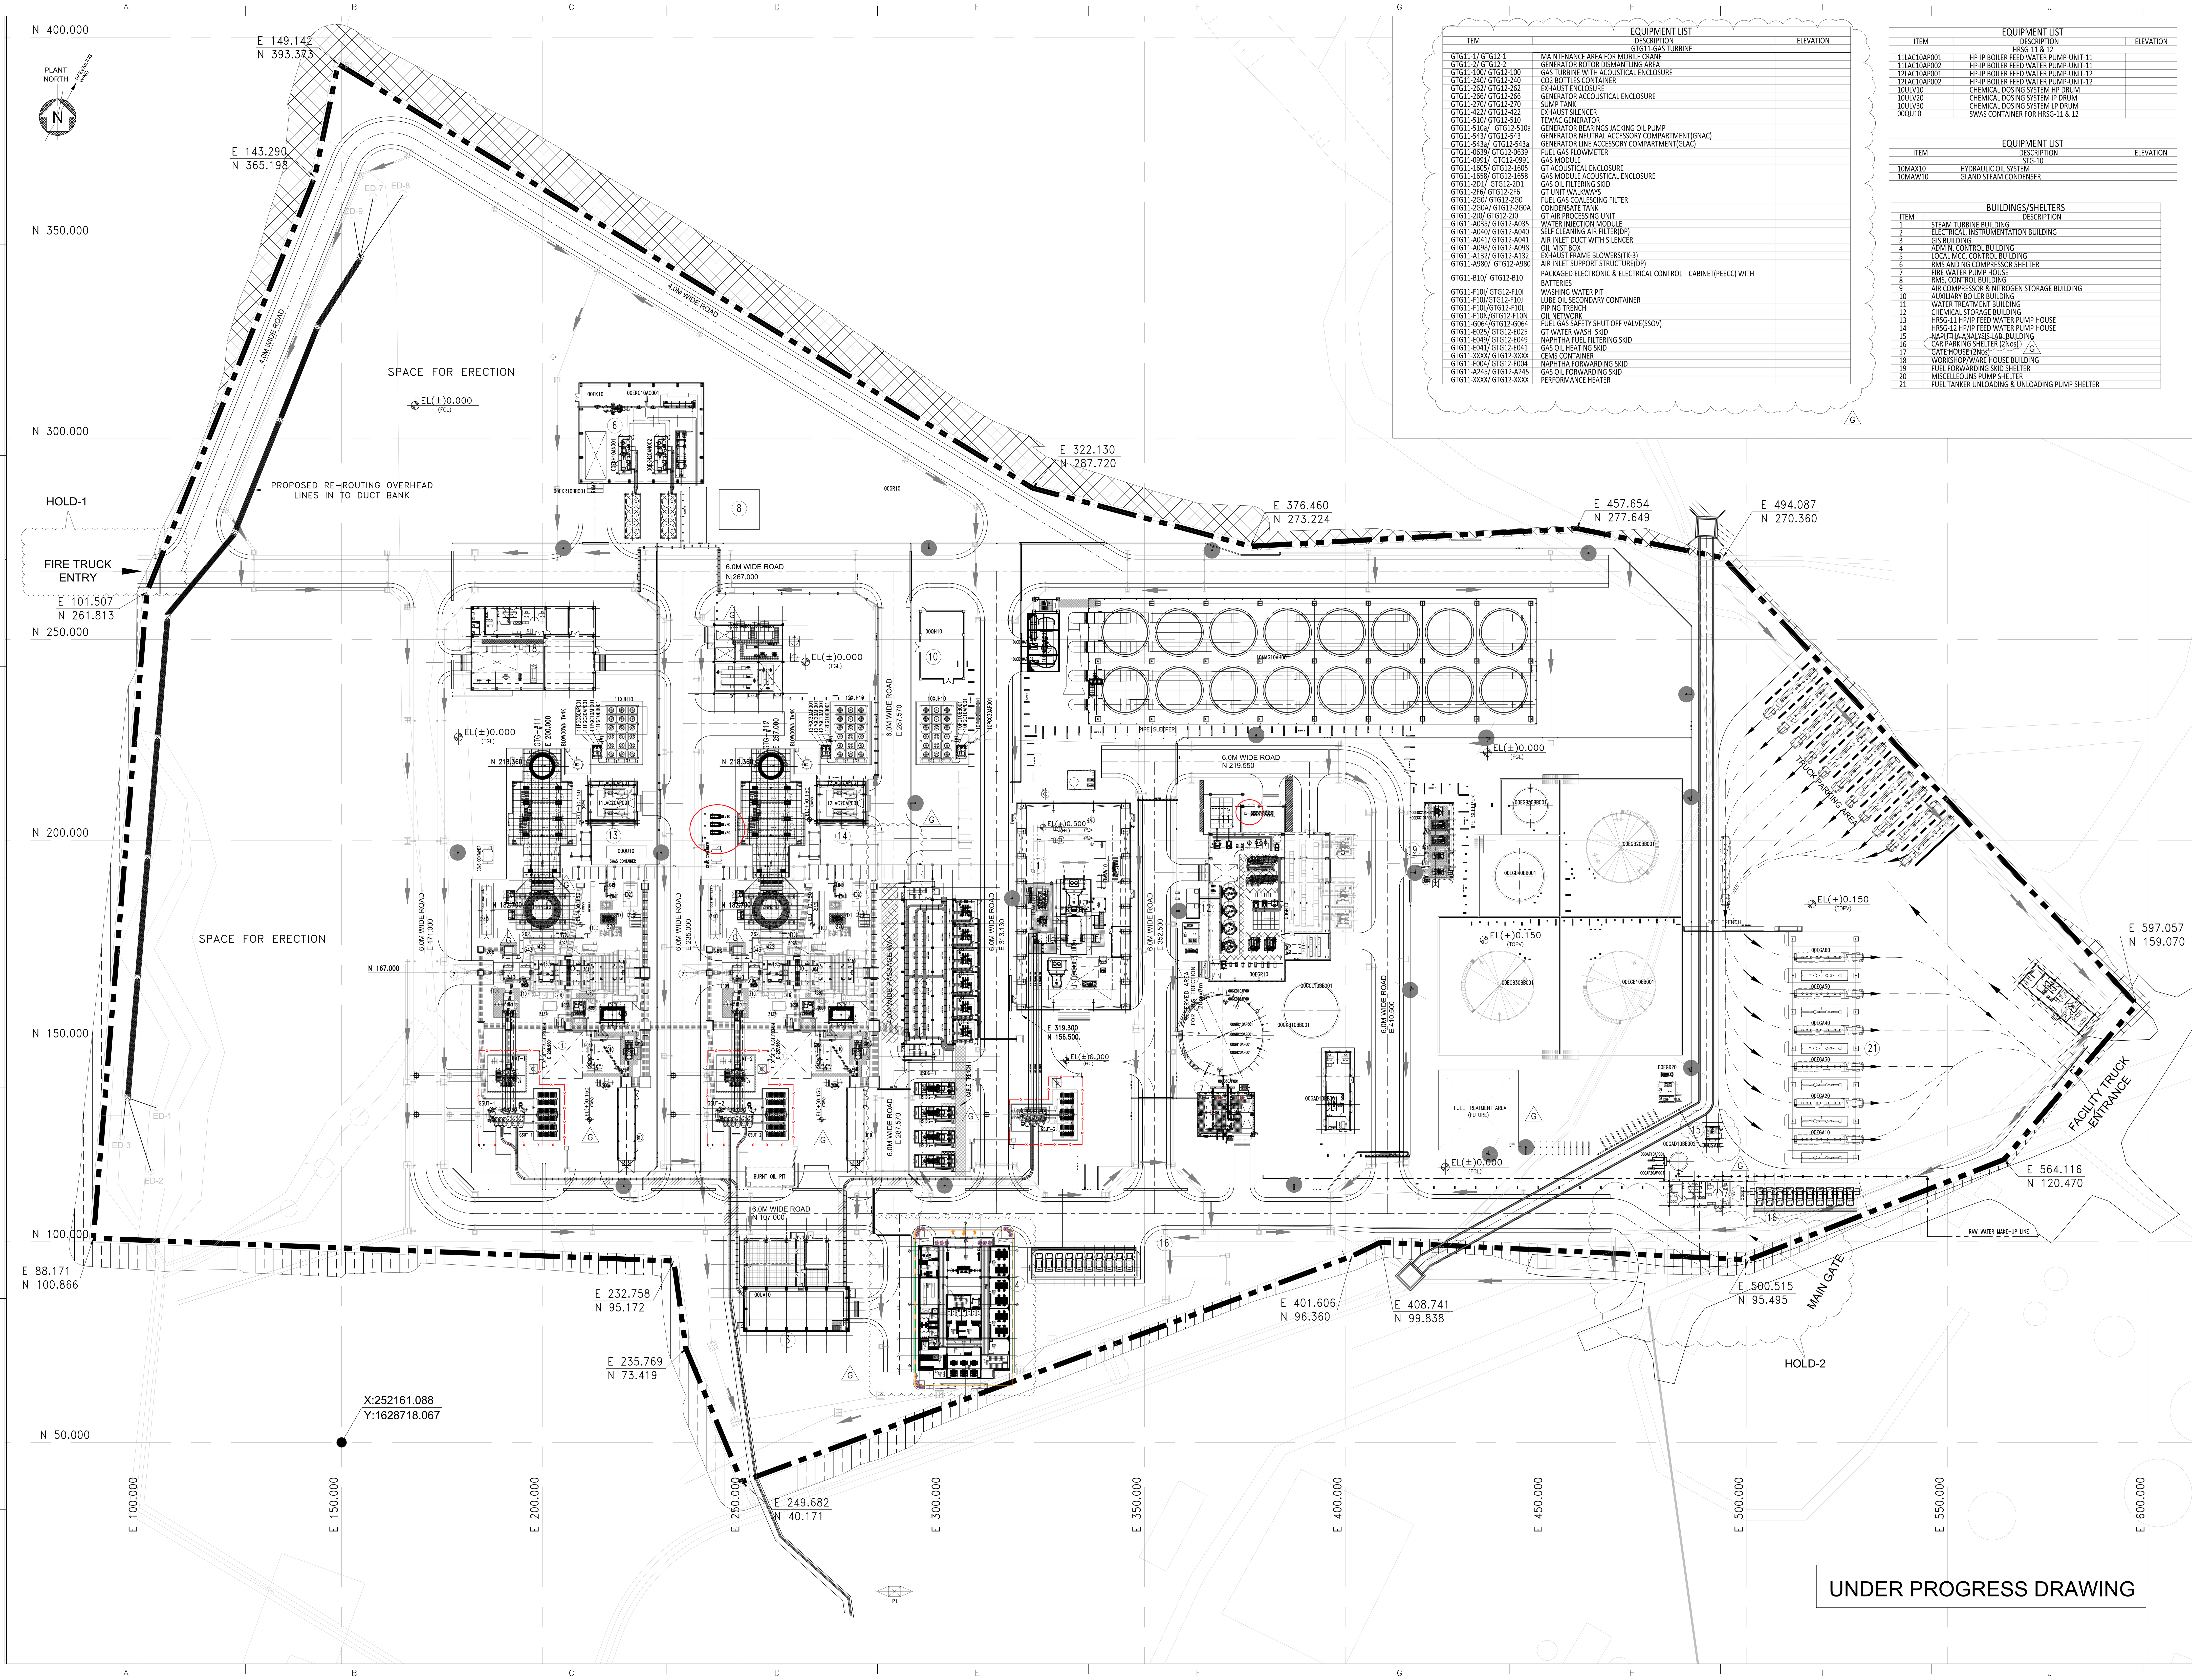


EQUIPMENT LIST

ITEM	DESCRIPTION	ELEVATION
	GTG11-GAS TURBINE	
GTG11-1/ GTG12-1	MAINTENANCE AREA FOR MOBILE CRANE	
GTG11-2/ GTG12-2	GENERATOR ROTOR DISMANTLING AREA	
GTG11-100/ GTG12-100	GAS TURBINE WITH ACOUSTICAL ENCLOSURE	
GTG11-240/ GTG12-240	CO2 BOTTLES CONTAINER	
GTG11-262/ GTG12-262	EXHAUST ENCLOSURE	
GTG11-266/ GTG12-266	GENERATOR ACCOUSTICAL ENCLOSURE	
GTG11-270/ GTG12-270	SUMP TANK	
GTG11-422/ GTG12-422	EXHAUST SILENCER	
GTG11-510/ GTG12-510	TEWAC GENERATOR	
GTG11-510a/ GTG12-510a	GENERATOR BEARINGS JACKING OIL PUMP	
GTG11-543/ GTG12-543	GENERATOR NEUTRAL ACCESSORY COMPARTMENT(GNAC)	
GTG11-543a/ GTG12-543a	GENERATOR LINE ACCESSORY COMPARTMENT(GLAC)	
GTG11-0639/ GTG12-0639	FUEL GAS FLOWMETER	
GTG11-0991/ GTG12-0991	GAS MODULE	
GTG11-1605/ GTG12-1605	GT ACOUSTICAL ENCLOSURE	
GTG11-1658/ GTG12-1658	GAS MODULE ACOUSTICAL ENCLOSURE	
GTG11-2D1/ GTG12-2D1	GAS OIL FILTERING SKID	
GTG11-2F6/ GTG12-2F6	GT UNIT WALKWAYS	
GTG11-2G0/ GTG12-2G0	FUEL GAS COALESCING FILTER	
GTG11-2G0A/ GTG12-2G0A	CONDENSATE TANK	
GTG11-2J0/ GTG12-2J0	GT AIR PROCESSING UNIT	
GTG11-A035/ GTG12-A035	WATER INJECTION MODULE	
GTG11-A040/ GTG12-A040	SELF CLEANING AIR FILTER(DP)	
GTG11-A041/ GTG12-A041	AIR INLET DUCT WITH SILENCER	
GTG11-A098/ GTG12-A098	OIL MIST BOX	
GTG11-A132/ GTG12-A132	EXHAUST FRAME BLOWERS(TK-3)	
GTG11-A980/ GTG12-A980	AIR INLET SUPPORT STRUCTURE(DP)	
GTG11-B10/ GTG12-B10	PACKAGED ELECTRONIC & ELECTRICAL CONTROL CABINET(PEECC) WITH BATTERIES	
GTG11-F10I/ GTG12-F10I	WASHING WATER PIT	
GTG11-F10J/GTG12-F10J	LUBE OIL SECONDARY CONTAINER	
GTG11-F10L/GTG12-F10L	PIPING TRENCH	
GTG11-F10N/GTG12-F10N	OIL NETWORK	
GTG11-G064/GTG12-G064	FUEL GAS SAFETY SHUT OFF VALVE(SSOV)	
GTG11-E025/ GTG12-E025	GT WATER WASH SKID	
GTG11-E049/ GTG12-E049	NAPHTHA FUEL FILTERING SKID	
GTG11-E041/ GTG12-E041	GAS OIL HEATING SKID	
GTG11-XXXX/ GTG12-XXXX	CEMS CONTAINER	
GTG11-E004/ GTG12-E004	NAPHTHA FORWARDING SKID	
GTG11-A245/ GTG12-A245	GAS OIL FORWARDING SKID	
GTG11-XXXX/ GTG12-XXXX	PERFORMANCE HEATER	

EQUIPMENT LIST

ITEM	DESCRIPTION	ELEVATION
	HRSG-11 & 12	
11LAC10AP001	HP-IP BOILER FEED WATER PUMP-UNIT-11	
11LAC10AP002	HP-IP BOILER FEED WATER PUMP-UNIT-11	
12LAC10AP001	HP-IP BOILER FEED WATER PUMP-UNIT-12	
12LAC10AP002	HP-IP BOILER FEED WATER PUMP-UNIT-12	
10ULV10	CHEMICAL DOSING SYSTEM HP DRUM	
10ULV20	CHEMICAL DOSING SYSTEM IP DRUM	
10ULV30	CHEMICAL DOSING SYSTEM LP DRUM	
00QU10	SWAS CONTAINER FOR HRSG-11 & 12	

EQUIPMENT LIST

ITEM	DESCRIPTION	ELEVATION
	STG-10	
10MAX10	HYDRAULIC OIL SYSTEM	
10MAW10	GLAND STEAM CONDENSER	


BUILDINGS/SHELTERS

ITEM	DESCRIPTION
1	STEAM TURBINE BUILDING
2	ELECTRICAL, INSTRUMENTATION BUILDING
3	GIS BUILDING
4	ADMIN, CONTROL BUILDING
5	LOCAL MCC, CONTROL BUILDING
6	RMS AND NG COMPRESSOR SHELTER
7	FIRE WATER PUMP HOUSE
8	RMS, CONTROL BUILDING
9	AIR COMPRESSOR & NITROGEN STORAGE BUILDING
10	AUXILIARY BOILER BUILDING
11	WATER TREATMENT BUILDING
12	CHEMICAL STORAGE BUILDING
13	HRSG-11 HP/IP FEED WATER PUMP HOUSE
14	HRSG-12 HP/IP FEED WATER PUMP HOUSE
15	NAPHTHA ANALYSIS LAB. BUILDING
16	CAR PARKING SHELTER (2Nos)
17	GATE HOUSE (2Nos)
18	WORKSHOP/WARE HOUSE BUILDING
19	FUEL FORWARDING SKID SHELTER
20	MISCELLEOUNS PUMP SHELTER
21	FUEL TANKER UNLOADING & UNLOADING PUMP SHELTER

G

KEY-PLAN

THIS AREA

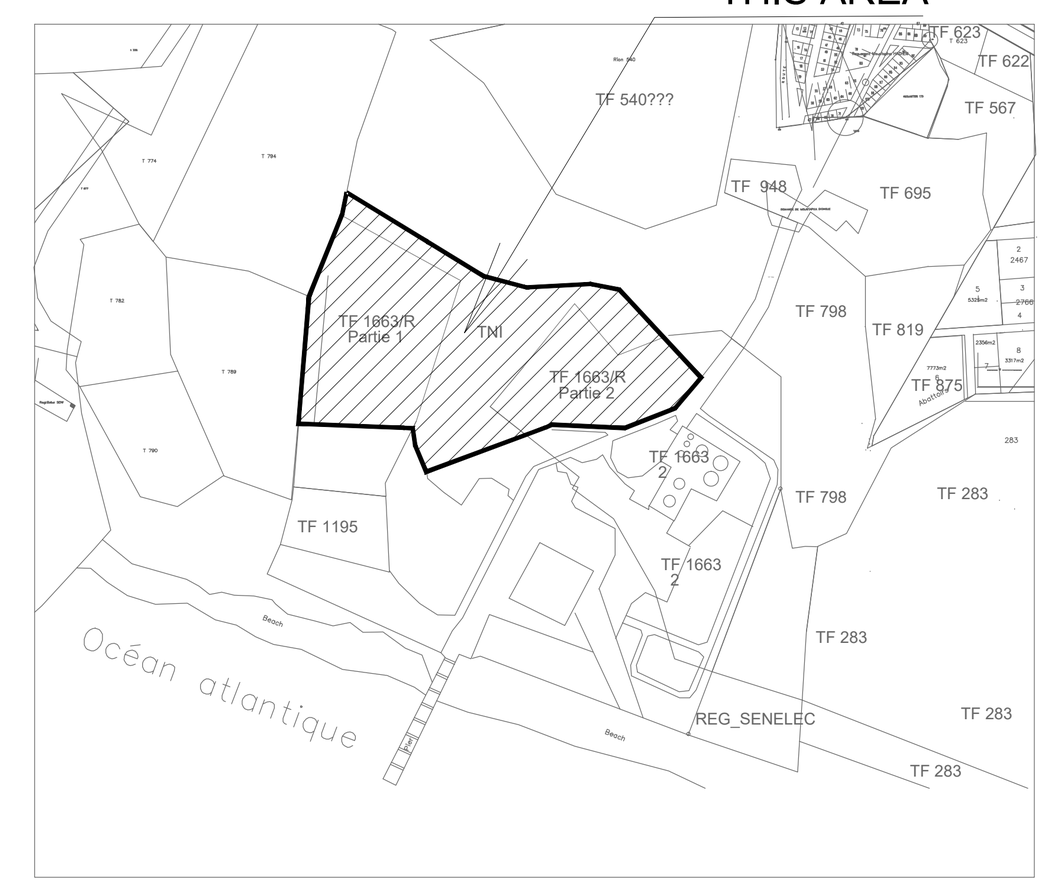

EQUIPMENT LIST

ITEM	DESCRIPTION	ELEVATION
00EGB10BB001	NAPHTHA STORAGE TANK 1	
00EGB20BB001	NAPHTHA STORAGE TANK 2	
00EGB30BB001	NAPHTHA STORAGE TANK 3	
00EGB40BB001	NAPHTHA BUFFER TANK	
00EGB50BB001	GAS OIL TANK	
00EGA10 AP001	NAPHTHA UNLOADING SKID 1	
00EGA20 AP001	NAPHTHA UNLOADING SKID 2	
00EGA30 AP001	NAPHTHA UNLOADING SKID 3	
00EGA40 AP001	NAPHTHA UNLOADING SKID 4	
00EGA50 AP001	NAPHTHA UNLOADING SKID 5	
00EGA60 AP001	GAS OIL UNLOADING SKID	
00GCL10BB001	DEMINERALIZED WATER STORAGE TANK	
00GAD10BB001	RAW AND FIRE WATER STORAGE TANK	
00SG10AP001	FIRE WATER MAIN PUMP	
00SG20AP001	FIRE WATER DIESEL PUMP	
00SG30AP001	FIRE WATER JOCKEY PUMP	
00GAF10AP001	RAW WATER PUMP	
00GAF20AP001	RAW WATER PUMP	
00GHC10AP001	MAKEUP WATER PUMP 1	
00GHC20AP001	MAKEUP WATER PUMP 2	
00GH30AP001	SERVICE WATER PUMP 1	
00GH40AP001	SERVICE WATER PUMP 2	
00GKB10AP001	POTABLE WATER PUMP 1	
00GKB20AP001	POTABLE WATER PUMP 2	
11PGC10AP001	GT-11 CCCW PUMP 1	
11PGC20AP001	GT-11 CCCW PUMP 2	
12PGC10AP001	GT-12 CCCW PUMP 1	
12PGC20AP001	GT-12 CCCW PUMP 2	
10PGC10AP001	STG CCCW PUMP 1	
10PGC20AP001	STG CCCW PUMP 2	
11PGB50BB001	GT-11 CCCW EXPANSION TANK	
12PGB50BB001	GT-12 CCCW EXPANSION TANK	
10PGB50BB001	STG CCCW EXPANSION TANK	
10MAG10AH001	AIR COOLED CONDENSER	
10LCM10BB001	CONDENSATE COLLECTION TANK	
10LCB10AP001	CONDENSATE EXTRACTION PUMP-1	
10LCB20AP001	CONDENSATE EXTRACTION PUMP-2	
10LCB30AP001	CONDENSATE EXTRACTION PUMP-3	
00EGR10	OIL WATER SEPARATOR-1	
00EGR20	OIL WATER SEPARATOR-2	
00QE10AN001	PLANT AIR COMPRESSOR 1	
00QE20AN001	PLANT AIR COMPRESSOR 2	
00QE10	COMPRESSED AIR SYSTEM	
00EK10	RMS PACKAGE	
11HNE10	BYPASS STACK UNIT-11	
12HNE10	BYPASS STACK UNIT-12	
00QH10	AUXILIARY BOILER	
11PGD10	GT-11 FIN FAN COOLERS	
12PGD10	GT-12 FIN FAN COOLERS	
10PGD10	STG FIN FAN COOLERS	
00EKH10AN001	GAS BOOSTER COMPRESSOR-1	
00EKH20AN001	GAS BOOSTER COMPRESSOR-2	
00EKR10BB001	CONDENSATE COLLECTION TANK (FUEL GAS AREA)	
00EKC10AC001	DEW POINT HEATER	
00GKB10BB001	POTABLE WATER TANK	
00GAD10BB001	BUFFER WATER TANK	
00EGC10AP001	AUXILIARY FUEL OIL FORWARDING PUMP	
00EGC20AP001	AUXILIARY FUEL OIL FORWARDING PUMP	
00GC10	DM WATER SYSTEM	
00GR10	SEWAGE TREATMENT PLANT	
00GN10	WASTE WATER TREATMENT PLANT	
00QJD10	NITROGEN STORAGE SYSTEM	

ELECTRICAL EQUIPMENTS

ITEM	DESCRIPTION
BSDG-1	BLACK START DIESEL GENERATOR (420V, 1250kVA)
BSDG-2	BLACK START DIESEL GENERATOR (420V, 1250kVA)
BSDG-3	BLACK START DIESEL GENERATOR (420V, 1250kVA)
BSDG-4	BLACK START DIESEL GENERATOR (420V, 1250kVA)
GSUT-1	GENERATOR STEP UP TRANSFORMER (225/90/15kV, 144/180 MVA)
GSUT-2	GENERATOR STEP UP TRANSFORMER (225/90/15kV, 144/180 MVA)
GSUT-3	GENERATOR TRANSFORMER (225/15kV, 144/180 MVA)
UAT-1	UNIT AUX. TRANSFORMER (15/6.9kV, 16/20MVA)
UAT-2	UNIT AUX. TRANSFORMER (15/6.9kV, 16/20MVA)
ACC TRF-1	ACC SERVICE TRANSFORMER (6.6/0.42kV, 2.0MVA)
ACC TRF-2	ACC SERVICE TRANSFORMER (6.6/0.42kV, 2.0MVA)
ACC TRF-3	ACC SERVICE TRANSFORMER (6.6/0.42kV, 2.0MVA)
UST-1	UNIT SERVICE TRANSFORMER (6.6/0.42kV, 2.5MVA)
UST-2	UNIT SERVICE TRANSFORMER (6.6/0.42kV, 2.5MVA)
SST-1	STATION SERVICE TRANSFORMER (6.6/0.42kV, 2.5MVA)
SST-2	STATION SERVICE TRANSFORMER (6.6/0.42kV, 2.5MVA)
BSDG-TRF-1	BLACK START DG TRANSFORMER (0.4/6.9kV, 2.5MVA)

REFERENCE DRAWINGS

1. SNC-36-VGA-EDB-CEI-001 – OVERALL CALBE ROUTING LAYOUT
2. SNC-36-VGA-EDB-CEI-030 – 90KV EXISTING GIS TO PLANT BOUNDARY CABLE ROUTING LAYOUT

LEGEND

FFL	– FINISHED FLOOR LEVEL		– PIPE RACK
FGL	– FINISHED GRADE LEVEL		– SLEEPER
TOPV	– TOP OF PAVING		– TRENCH
	– PLANT BOUNDARY		
	– BURIED PIPING		

GENERAL NOTES

1. ALL LEVELS AND GRIDS ARE IN METERS UNLESS NOTED OTHERWISE.
2. EL.(±) 0.000M CORRESPONDS TO FINISHED GROUND LEVEL RL.(+) 9.500M

HOLD

1. FIRE TRUCK ENTRY ROAD TO BE CONFIRMED.
2. PLANT ENTRANCE ROAD WILL BE FINALISED LATER.

REV.	DATE	DESCRIPTION	DESIGNED	CHECKED	APPROVED
H	-	UNDER PROGRESS DRAWING			
G	15.07.2021	REVISED AS PER CLIENT COMMENTS	SS	TLM	SSR
F	24.06.2021	REVISED AS PER CLIENT COMMENTS	SS	TLM	SSR
E	15.04.2021	REVISED AS PER CLIENT COMMENTS	SS	TLM	SSR
D	05.04.2021	REVISED AS PER CLIENT COMMENTS	SS	TLM	SSR
C	30.03.2021	REVISED AS PER CLIENT MEETING DATED 26.03.21	SS	TLM	SSR
B3	16.03.2021	REVISED AS PER CLIENT COMMENTS	SS	TLM	SSR
B2	26.02.2021	REVISED AS PER CLIENT COMMENTS	SS	TLM	SSR
A	06.01.2021	PRELIMINARY ISSUE	SS	TLM	SSR

EMPLOYER
WEST AFRICAN ENERGY S.A.
SENEGAL NATIONAL ELECTRICITY AGENCY

EPC CONTRACTOR
ÇALIK ENERJİ SAN. VE TİC. A.Ş

ENGINEERING SUBCONTRACTOR
FICHTNER Consulting Engineers (India) Private Limited
Chennai, Bengaluru

PROJECT:
CAP DES BICHES
COMBINED CYCLE POWER STATION PROJECT
(300 MW)

STATUS: FOR INFORMATION ☐ FOR APPROVAL ☒ APPROVED FOR CONSTRUCTION ☐ AS BUILT ☐

SCALE:	DESIGNED BY:	SS
1:500	CHECKED BY:	TLM
	APPROVED BY:	SSR
	DATE:	07.01.2021

UNDER PROGRESS DRAWING

TITLE:	CONTRACT No.	SNC-36	SIZE: A0
PLOT PLAN	PAGE No.	01 OF 01	
	DRAWING No.	SNC-36-VDD-MDF-CEI-001	REV. H